


System Guide: Ultra Lightweight Deco

Resin System Coatings

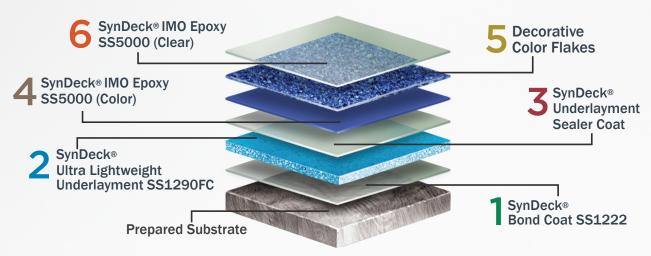

PRODUCT	DESCRIPTION & USE
BOND COAT SS1222	 Primer material and bond promoter. Long open time epoxy with ease of use. Specifically designed to be used in conjunction with installation of underlayment and other materials.
ULTRA LIGHTWEIGHT UNDERLAYMENT SS1290FC	 Three (3) component, aggregate-filled, 100% solids, amine-cured epoxy flooring material. Trowel applies as an ultra lightweight underlayment. Specifically designed for use in continuous service areas where grades, contours and surface irregularities exist.
3 UNDERLAYMENT SEALER COAT	 Two (2) component, high thixotropic index epoxy formulated for low odor and easy application. Specifically designed to seal decks, floors and other surfaces where higher porosities may be of concern.
IMO EPOXY SS5000 (COLOR)	 100% solids, amine-cured epoxy color coat. Available in standard, special and custom colors. User friendly and self-leveling with excellent adhesion. No blushing when applied at low temperatures.
5 DECORATIVE COLOR FLAKES	Can be broadcast into IMO SS5000 color or clear coats for added decorative appearance or texture. Not a SynDeck product. Contact our technical team for recommendations.
6 IMO EPOXY SS5000 CLEAR	 100% solids, amine-cured epoxy top coat. User friendly and self-leveling with excellent adhesion, abrasion and chemical resistance. No blushing when applied at low temperatures.

Key Benefits



Simple, stepped system integrates fully compatible products with great adhesion.



Durable, decorative finish offers numerous color and texture variations.



Waterproof system provides a longer lasting solution.



All components are IMO certified and US Navy approved.



Slip resistant finishes can be created.

Manufactured by:

① US: 1.877.993.7627

① INTL: +1 562.946.8781

① UK: +44 (0) 7774 725006

⊠ info@syndeckmarine.com

syndeckmarine.com


SynDeck® IMO Epoxy Colors

Standard Colors



Special and Custom Colors

A full range of special and custom colors are available on request. Minimums, surcharges, overruns and lead times apply. Contact your SynDeck sales representative for complete pricing and availability details.

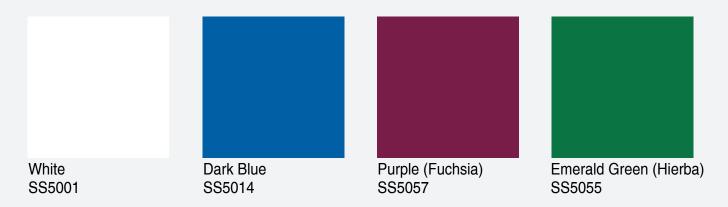

Colors shown are approximate representations. Actual results will vary.

Rev 10/08/19



① US: 1.877.993.7627 ① INTL: +1 562.946.8781

① UK: +44 (0) 7774 725006

⊠ info@syndeckmarine.com

syndeckmarine.com