

# SYSTEM GUIDE

## Super Light Terrazzo Anti-Slip

### INTERIOR MONOLITHIC UNDERLAYMENT ANTI-SLIP DECK COVERING

#### Overview

SynDeck™ Super Light Terrazzo Anti-Slip System is an easy to apply system designed for interior decks. This is a vibrant epoxy underlayment flooring system with excellent adhesion and corrosion resistance. It is designed to meet IMO and Mil-Spec requirements. Various Terrazzo color blends are still available with this anti-slip Terrazzo version to provide a unique aesthetic appeal to deck areas, primarily wet spaces, such as showers, toilets, and wash basins.

#### Approval

- IMO

#### Where to Use

- Passageways
- Galleys
- Wet Spaces
- Living Quarters

#### Product Application


Before

After

Close-up



#### System Layers

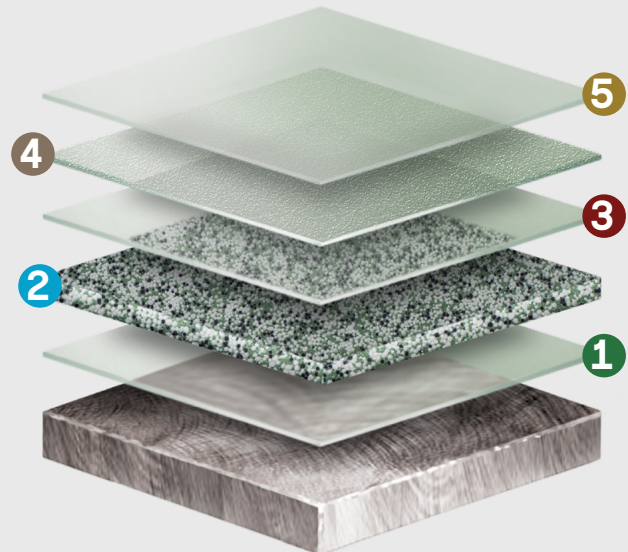

#### System Products

1. SynDeck™ Bond Coat SS1222
2. SynDeck™ Ultra Lightweight Terrazzo SS1290FCT
3. SynDeck™ Super Underlayment Sealer
4. SynDeck™ Clear Epoxy SS5000
5. SynDeck™ Clear Epoxy SS5000 (with slip resistant additive)

#### Benefits


- Waterproof
- Durable, attractive finish
- Enhanced Slip resistance
- Fast return to service

# SYSTEM GUIDE


## Super Light Terrazzo Anti-Slip

INTERIOR MONOLITHIC UNDERLAYMENT ANTI-SLIP DECK COVERING


### Standard Color Options




**Tuxedo**




**Sea Spray**




**Whirlpool**




**Mountain Peak**




**Tropical Lagoon**




**Clover Meadow**




**Hot Rod**



**Newsprint**



**Snowy Barn**



**Calico**



**Canyon Wall**



**Cotton Seed**

*Colors shown are approximate representations.  
Actual results will vary.*

*Please contact your SynDeck™ representative for a full  
range of special and custom colors along with complete  
pricing and availability.*

### Available Tests

- Mil-PRF-32584 – Corrosion Resistance
- Mil-PRF-32584 – Impact & Indentation
- ASTM F1914 – Indentation
- ASTM C579 – Compressive Strength of Mortars
- ASTM C580 – Flexural Strength of Mortars
- ASTM D4541 – Pull-Off Strength of Coatings
- ASTM D523 – Gloss
- ASTM D2240 – Hardness (Shore D)
- ASTM D4060 – Abrasion (CS-17, 1000g, 1000 cycles)
- ASTM D1894 – Coefficient of Friction
- Moisture Absorption
- Resistance to Moisture & Temperature Changes