

# SYSTEM GUIDE

## Super Light Terrazzo Anti-Slip

### INTERIOR MONOLITHIC UNDERLAYMENT ANTI-SLIP DECK COVERING

#### Overview

SynDeck™ Super Light Terrazzo Anti-Slip system is an easy to apply system designed for interior decks. This is a vibrant epoxy underlayment flooring system with excellent adhesion and corrosion resistance. It is designed to meet IMO, ABS, and MIL-SPEC requirements. Various Terrazzo color blends are still available with this anti-slip terrazzo version to provide a unique aesthetic appeal to deck areas, primarily wet spaces, such as showers, toilets, and wash basins.

#### Approval

- IMO
- ABS
- MIL-SPEC

#### Where to Use

- Passageways
- Galleys
- Wet Spaces
- Living Quarters

#### Product Application


Before

After

Close-up



#### System Layers

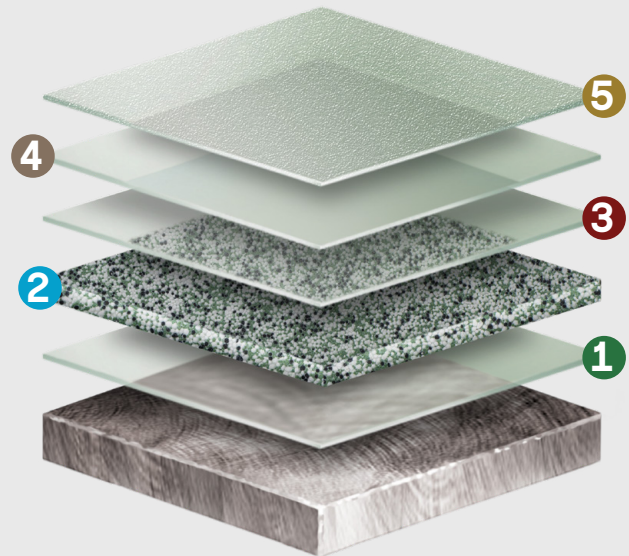

#### System Products


1. SynDeck™ Bond Coat SS1222
2. SynDeck™ Ultra Lightweight Terrazzo SS1290FCT
3. SynDeck™ Super Underlayment Sealer SS1259
4. SynDeck™ IMO Clear Epoxy SS5000
5. SynDeck™ IMO Clear Epoxy SS5000 (with slip-resistant additive)

# SYSTEM GUIDE


## Super Light Terrazzo Anti-Slip

INTERIOR MONOLITHIC UNDERLAYMENT ANTI-SLIP DECK COVERING


### Standard Color Options




Tuxedo



Sea Spray




Whirlpool




Mountain Peak




Tropical Lagoon




Clover Meadow




Hot Rod




Newsprint




Snowy Barn



Calico



Canyon Wall



Cotton Seed

Colors shown are approximate representations.  
Actual results will vary.

Please contact your SynDeck™ representative for a full range of special and custom colors along with complete pricing and availability.

### Benefits

- Waterproof
- Durable, attractive finish
- Enhanced slip resistance
- Fast return to service
- Deck leveling

### Available Tests

- MIL-PRF-32584 – Corrosion Resistance
- MIL-PRF-32584 – Impact & Indentation
- ASTM F1914 – Indentation
- ASTM C579 – Compressive Strength of Mortars
- ASTM C580 – Flexural Strength of Mortars
- ASTM D4541 – Pull-Off Strength of Coatings
- ASTM D523 – Gloss
- ASTM D2240 – Hardness (Shore D)
- ASTM D4060 – Abrasion (CS-17, 1000g, 1000 cycles)
- ASTM D1894 – Coefficient of Friction
- Moisture Absorption
- Resistance to Moisture & Temperature Changes