

SYSTEM GUIDE

DEEPDECK™

THICKER LAYER INTERIOR DECKING BASE

Overview

SynDeck DeepDeck™ system is easy to apply. The system is designed to be applied direct to metal and other substrates (GRP, wood, etc...) that require a thicker layer for interior deck applications. This is a 100% solids sealed underlayment system that levels the decks, provides waterproofing properties, and is lightweight. This system serves as a base for various SynDeck™ systems, as well as carpets, tile, EPDM rubber, and other coatings where thicker layer flooring up to 4 inches / 100 mm is required.

Approvals

- IMO

Where to Use

- Cabins
- Wet Spaces
- Passageways
- Sick Bays and Serveries


Benefits

- Slopes and Coves
- Deeper deck leveling, range 1/16" - 4.0"
- No epoxy heat exotherm

Product Application



System Layers

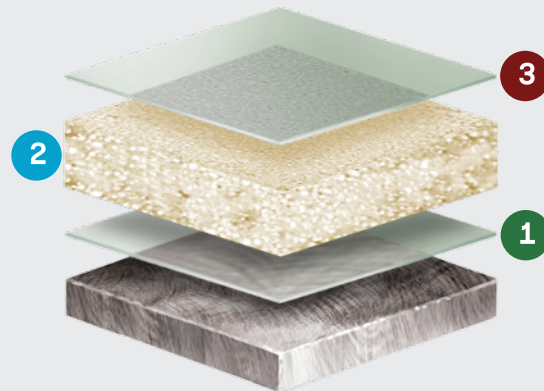

System Products

1. SynDeck™ Bond Coat SS1322
2. SynDeck™ Deep Lightweight Underlayment SS1394
3. SynDeck™ Super Underlayment Grout Sealer SS1350*

*in certification process

Available Tests

- MIL-PRF-32584 - Corrosion Resistance
- MIL-PRF-32584 - Impact Resistance
- MIL-PRF-24613 - Moisture Absorption
- ASTM F1914 - Indentation Resistance
- ASTM C579 - Compressive Strength of Mortars
- ASTM C580 - Flexural Strength of Mortars
- ASTM D4541 - Pull-Off Strength of Coatings
- ASTM D2240 - Hardness (Shore D)
- ASTM C307 - Tensile Strength



Marine Underlayment
and Deck Coatings

syndeckmarine | 1.877.993.7627 | info@syndeckmarine